




where inspiration flows  
taps | showering | accessories

technical sheet  
product code: ELE-128D/2-C/P



technical drawing:

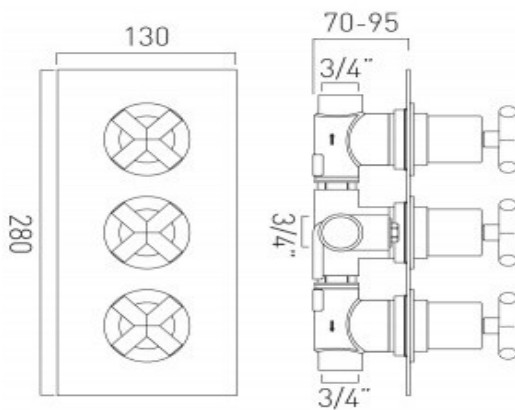


**description:** DX Elements concealed 2 outlet, 3 handle thermostatic shower valve wall mounted with rectangular backplate thermostatic cartridge V-001C-PLA flow cartridge C-301-RTC 2 x 3/4" female inlets 2 x 3/4" female outlets includes 3/4" - 1/2" adaptors inc. bleed valve for system flush on installation min-max wall mount 70-95mm optimum installation depth 82mm minimum operating pressure 0.2 bar LP (shower) minimum operating pressure 1.0 bar MP (bath)

**finishes:** chrome

**guarantee:** 12 year guarantee

**minimum operating pressure:** 0.2 bar LP shower 1.0 bar MP bath

**flow rate at 3.0 bar flow pressure:** 30 l/min

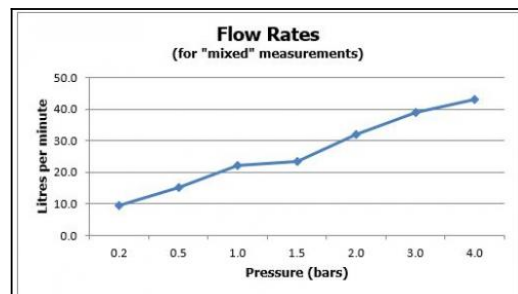

'mixed measurements' refers to equal hot and cold water supply flow rate for unregulated flow unless flow regulator fitted as standard

**certificates and awards:**



cert no. 1712062 cert no. NSF1913/1117

VADO wedmore road cheddar somerset england bs27 3eb  
tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com