# SPECIFICATION SHEET

**COLLECTION:** AXBRIDGE **PRODUCT CODE:** BC-AXB-148/2-CP



#### DESCRIPTION:

Axbridge 2 Outlet 2 Handle Thermostatic Valve wall mounted thermostatic cartridge V-701-34S diverter cartridge 1 x FL-805-33/2X 2 x 3/4" female inlets 2 x 3/4" female outlets includes 3/4" - 1/2" adaptors supplied with mortar/tile guard min-max wall mount 75-100mm minimum operating pressure 0.2 bar LP (shower) 1.0 bar MP (bath)

#### **FINISH:** Chrome


**MINIMUM OPERATING PRESSURE:** Shower 0.2 bar LP Bath 1.0 bar MP FLOW RATE AT 3.0 BAR FLOW PRESSURE: 31 l/min BC-AXB-148/2 35.0 33.0 (1 30.0 25.0 20.0 15.0 10.0 5.0 5.0 0.0 2.5 0.0 0.5 1.0 1.5 2.0 3.0 Pressure (bar) outlet 1 — outlet 2





# TECHNICAL DRAWING

**COLLECTION:** AXBRIDGE **PRODUCT CODE:** BC-AXB-148/2-CP

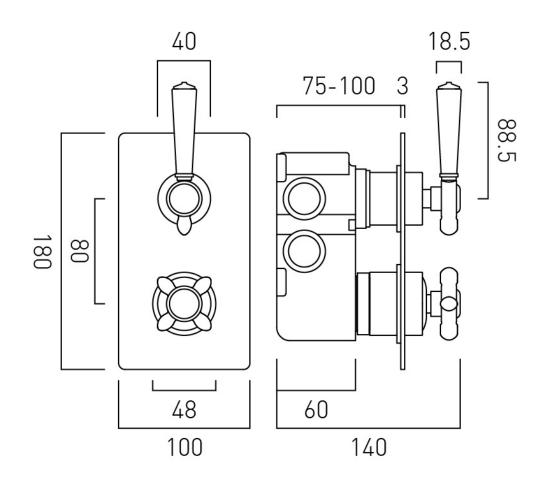



Timeless Design. Pioneering Performance.

# SPECIFICATION SHEET

**COLLECTION:** AXBRIDGE **PRODUCT CODE:** BC-AXB-HEAD/SA-CP



#### **DESCRIPTION:**


Axbridge single function round shower head with shower arm wall mounted 200mm (8in) shower head 1/2" threaded inlet minimum operating pressure 0.2 bar LP

#### FINISH:

Chrome

MINIMUM OPERATING PRESSURE: 0.2 bar LP

FLOW RATE AT 3.0 BAR FLOW PRESSURE: 21 L/min








Your journey to distinction awaits.

Timeless Design. Pioneering Performance.

# TECHNICAL DRAWING

**COLLECTION:** AXBRIDGE **PRODUCT CODE:** BC-AXB-HEAD/SA-CP

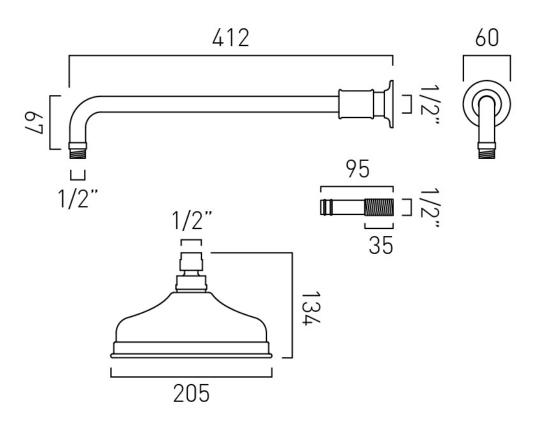



Timeless Design. Pioneering Performance.

# SPECIFICATION SHEET

**COLLECTION:** AXBRIDGE **PRODUCT CODE:** BC-AXB-SFMKWO-CP



#### DESCRIPTION:


Axbridge single funtion mini shower kit wall mounted with 150cm hose and bracket with integrated outlet 1/2" inlet minimum operating pressure 0.2 bar LP

### FINISH:

Chrome

MINIMUM OPERATING PRESSURE: 0.2 bar LP

FLOW RATE AT 3.0 BAR FLOW PRESSURE: 22 l/min








## TECHNICAL DRAWING

**COLLECTION:** AXBRIDGE **PRODUCT CODE:** BC-AXB-SFMKWO-CP

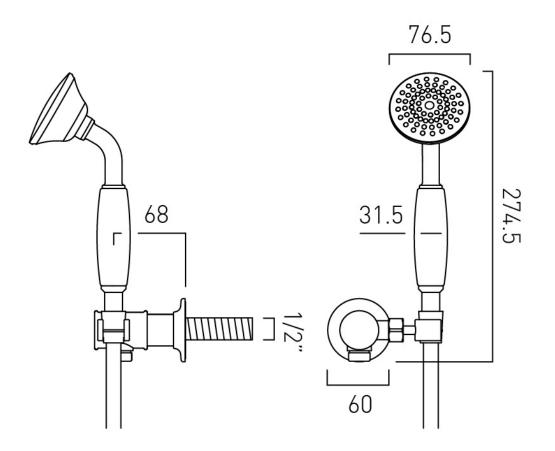



Timeless Design. Pioneering Performance.