SPECIFICATION SHEET

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T148/2-H-XBNK



DESCRIPTION:

Knurled X Fusion Tablet
2 outlet 2 handle
horizontal concealed thermostatic shower valve
with all-flow function
thermostatic cartridge V-704-34S
diverter cartridge FL-802-33/2MX
2 x 3/4" female inlets
2 x 3/4" female outlets
includes 3/4" - 1/2" adaptors
tile-to mortar guard included
min-max wall mount 75-100mm
optimum installation depth 87mm
minimum operating pressure
0.2 bar LP (shower) 1.0 bar MP (bath)

FINISH:


Brushed Black X Nickel

MINIMUM OPERATING PRESSURE:

0.2 bar LP (shower) 1.0 bar MP (bath)

FLOW RATE AT 3.0 BAR FLOW PRESSURE:

32 L/min





tel: 01934 744466 email: sales@vado.com www.vado.com





taps | showering | accessories



TECHNICAL DRAWING

COLLECTION: KNURLED X FUSION **PRODUCT CODE:** IND-T148/2-H-XBNK

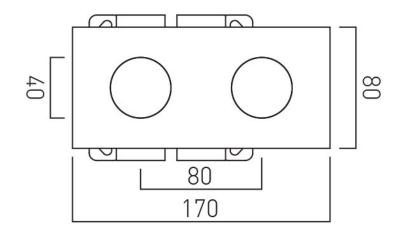

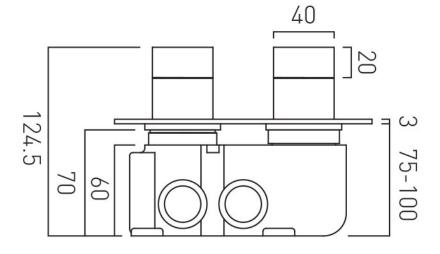

tel: 01934 744466 email: sales@vado.com www.vado.com

