




it's a personal experience
taps | showering | accessories

technical sheet
product code: WAR-262/CD-15-C/P



technical drawing:

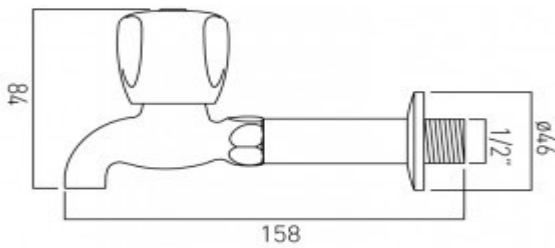

description: bidetap 150mm wall mounted supplied with hot and cold indices ceramic cartridge AST-VALVE/CD/CL-1/2 1/2" x 20mm threaded tail connections


finishes: chrome

ECO recommended flow regulator product code: FR-106/4-PLA

guarantee: 12 year guarantee

minimum operating pressure: 0.2 bar LP

flow rate at 3.0 bar flow pressure: 25 l/min

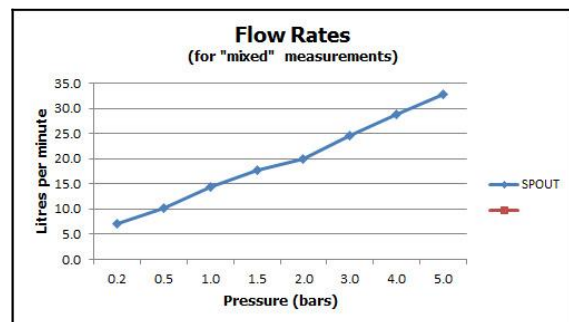

'mixed measurements' refers to equal hot and cold water supply flow rate for unregulated flow unless flow regulator fitted as standard