




it's a personal experience
taps | showering | accessories

technical sheet
product code: TAB-148/2-KOV-C/P



technical drawing:

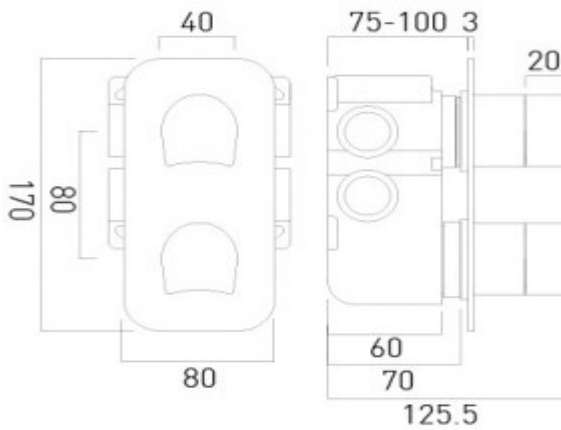

description: tablet kovera vertical concealed 2 outlet, 2 handle thermostatic shower valve with all-flow function wall mounted thermostatic cartridge V-001C-PLA diverter cartridge TAB-001G-DIV 2 x 3/4" female inlets 2 x 3/4" female outlets includes fittings for 1/2" and 3/4" pipework minimum operating pressure 0.2 bar LP (shower) 1.0 bar MP (bath) supplied with mortar/tile guard min-max wall mount 75-100mm optimum installation depth 87mm

finishes: chrome

guarantee: 12 year guarantee

minimum operating pressure: 0.2 bar LP (shower) 1.0 bar MP (bath)

flow rate at 3.0 bar flow pressure: outlet 1 29.6 outlet 2 29.7 both 31.9 l/min