




where inspiration flows
taps | showering | accessories

technical sheet
product code: TAB-128/2-H-OMI-C/P



technical drawing:

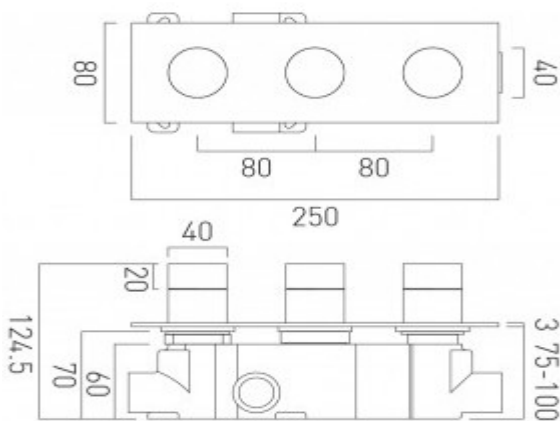

description: Tablet Omika horizontal concealed 2 outlet 3 handle thermostatic shower valve with all-flow function wall mounted
thermostatic cartridge V-001C-PLA
2 x flow cartridge TAB-002A-3/4
2 x 3/4" female inlets
2 x 3/4" female outlets
includes 3/4" - 1/2" adaptors
supplied with mortar/tile guard
min-max wall mount 75-100mm
optimum installation depth 87mm
minimum operating pressure
0.2 bar LP (shower) 1.0 bar MP (bath)

finishes: chrome

guarantee: 12 year guarantee

minimum operating pressure: 0.2 bar LP (shower) 1.0 bar MP (bath)

flow rate at 3.0 bar flow pressure: outlet 1 34.5 outlet 2 34.0 both 36.6 l/min