




where inspiration flows  
taps | showering | accessories

technical sheet  
product code: TAB-148-OMI-C/P



technical drawing:

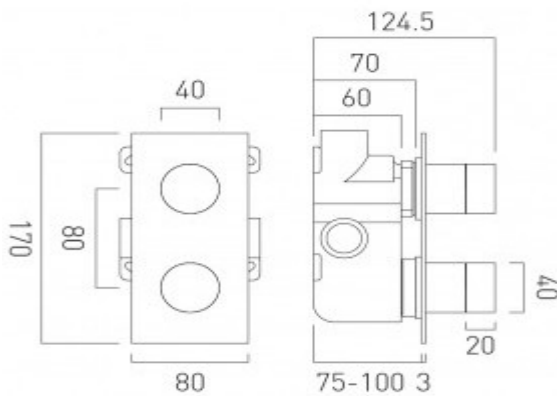

description: Tablet Omika vertical concealed 1 outlet 2 handle thermostatic shower valve wall mounted thermostatic cartridge V-001C-PLA flow cartridge TAB-002A-3/4 2 x 3/4" female inlets 1 x 3/4" female outlet includes 3/4" - 1/2" adaptors supplied with mortar/tile guard min-max wall mount 75-100mm optimum installation depth 87mm minimum operating pressure 0.2 bar LP (shower) 1.0 bar MP (bath)

finishes: chrome

guarantee: 12 year guarantee

minimum operating pressure: 0.2 bar LP (shower) 1.0 bar MP (bath)

flow rate at 3.0 bar flow pressure: 33 l/min