




where inspiration flows  
taps | showering | accessories

technical sheet  
product code: PHA-148D/3-C/P



technical drawing:

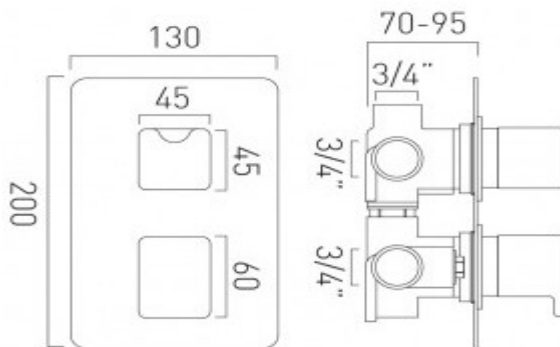


**description:** DX Phase  
concealed 3 outlet, 2 handle thermostatic  
shower valve with integrated diverter  
wall mounted  
with rectangular backplate  
thermostatic cartridge V-001C-PLA  
diverter cartridge FL-804-33X/3X  
2 x 3/4" female inlets  
3 x 3/4" female outlets  
includes 3/4" - 1/2" adaptors  
inc. bleed valve for system flush on installation  
min-max wall mount 70-95mm  
optimum installation depth 82mm  
minimum operating pressure 0.2 bar LP (shower)  
minimum operating pressure 1.0 bar MP (bath)

**finishes:** chrome

**guarantee:** 12 year guarantee

**minimum operating pressure:** 0.2 bar LP shower 1.0 bar MP bath

**flow rate at 3.0 bar flow pressure:** 30 l/min

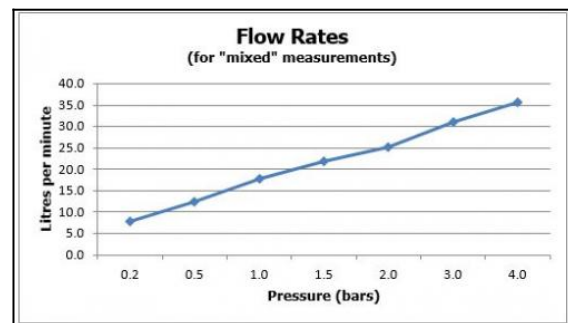

'mixed measurements' refers to equal hot and cold water supply  
flow rate for unregulated flow unless flow regulator fitted as standard