
# SPECIFICATION SHEET

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T148/2-XZBK





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

## SHOWER TYPE

Shower Valve

# **VALVE TYPE**

Concealed

# STYLE

Round, Knurled

# ORIENTATION

Vertical

## NUMBER OF OUTLETS

2 Outlet

## **HANDLES**

2 Handle

## WITH ALL-FLOW FUNCTION

Yes

# WITH INTEGRATED DIVERTER

No

# COMPATIBLE WITH STUDFAST

No

tel: 01934 744466 email: sales@vado.com

www.vado.com

WHERE INSPIRATION FLOWS



# SPECIFICATION SHEET

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T148/2-XZBK

WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION

No

WITH SHOWER KIT

Νo

OPTIMUM INSTALLATION DEPTH

87mm

INCLUDES MORTAR / TILE GUARD

Yes

COMPATIBLE WITH EASY-FIX BRACKETS

No

WITH THERMOSTATIC TECHNOLOGY

Yes

MIN-MAX WALL MOUNT

75-100mm

**CONNECTIONS / FITTINGS** 

2 x 3/4" female inlets / 2 x 3/4" female outlets

SPARE PARTS

thermostatic cartridge V-704-34S, diverter cartridge FL-802-33/2MX

MOUNTING


Wall Mounted

PLUMBING SYSTEM SUITABILITY

Gravity System, Combination Boiler

**COLLECTION NAME** 

Knurled X Fusion



www.vado.com





# SPECIFICATION SHEET

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T148/2-XZBK

# FINISH

Bronze/Black

## MINIMUM OPERATING PRESSURE

0.2 Bar LP (Shower) / 1.0 Bar MP (Bath)

## MAXIMUM OPERATING PRESSURE

5.0 Bar HP

# GUARANTEE

15 Year Guarantee

tel: 01934 744466 email: sales@vado.com


www.vado.com





# TECHNICAL DRAWING

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T148/2-XZBK

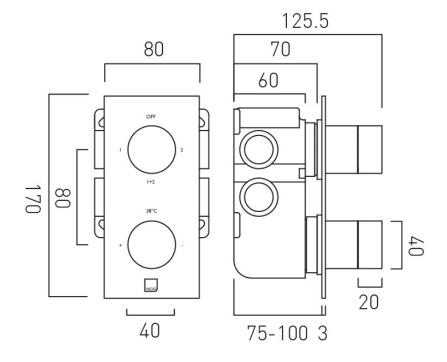

tel: 01934 744466 email: sales@vado.com

www.vado.com



