




it's a personal experience
taps | showering | accessories

technical sheet
product code: LIF-132-C/P



technical drawing:

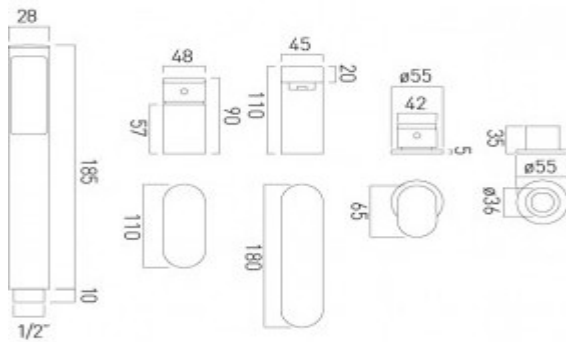

description: 4 hole bath shower mixer
single lever
deck mounted
with water flow straightener
ceramic cartridge CAR-K40A
2 x 10mm (1/2") flexipipe connection on valve
2 x 1/2"x1/2" flexipipe
1 x 1/2"x1/2" x 150cm shower hose
4 x 350mm flexipipe connections
valve deck mount drill hole diameter 32mm
spout deck mount drill hole diameter 28mm
diverter deck mount drill hole diameter 28mm
handset deck mount drill hole diameter 28mm


finishes: chrome

ECO recommended flow regulator product code: FR-SHOWER/9-C/P

guarantee: 12 year guarantee

minimum operating pressure: 3.0 bar HP

flow rate at 3.0 bar flow pressure: Bath: 12, Shower: 15 l/min

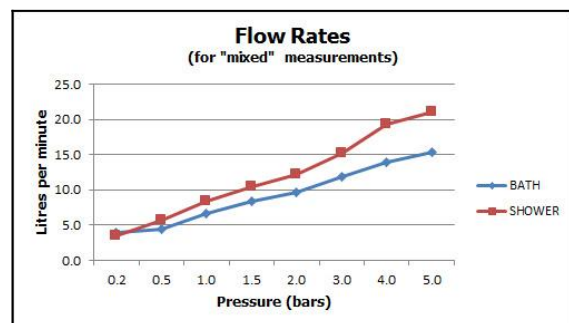

'mixed measurements' refers to equal hot and cold water supply flow rate for unregulated flow unless flow regulator fitted as standard