




it's a personal experience
taps | showering | accessories

technical sheet
product code: ZOO-135-3/4-C/P



technical drawing:

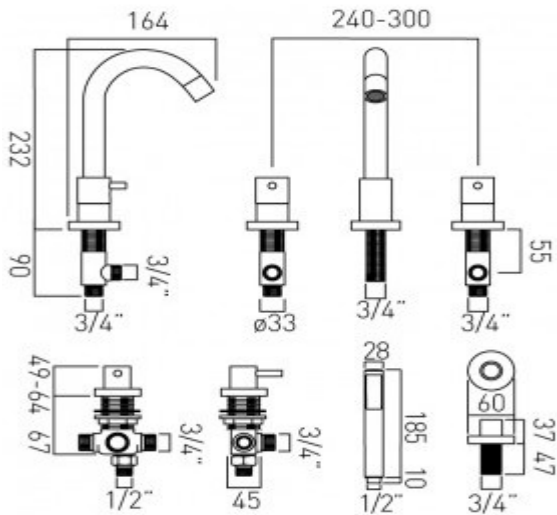

description: 5 hole bath shower mixer deck mounted with fixed spout cold ceramic cartridge ELE-VALVE/CD/CL-3/4 hot ceramic cartridge ELE-VALVE/CD/HT-3/4 3 x 3/4" x 3/4" x 500mm flexipipe connections valve deck mount drill hole diameter 33mm spout deck mount drill hole diameter 28mm diverter deck mount drill hole diameter 46mm handset deck mount drill hole diameter 27mm


finishes: chrome

H₂O Eco recommended flow regulator product code: FR-SHOWER/9-C/P

guarantee: 12 year guarantee

minimum operating pressure: 1.0 bar MP

flow rate at 3.0 bar flow pressure: Spout: 24, Shower: 20 l/min

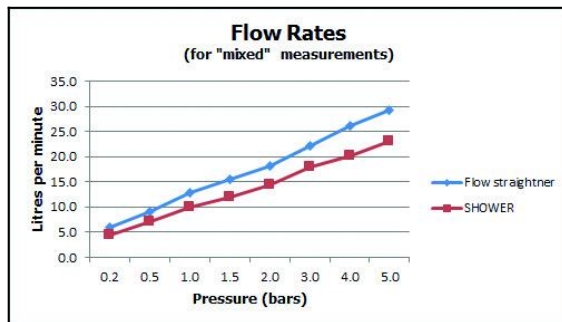

'mixed measurements' refers to equal hot and cold water supply flow rate for unregulated flow unless flow regulator fitted as standard