


SPECIFICATIONS 2020

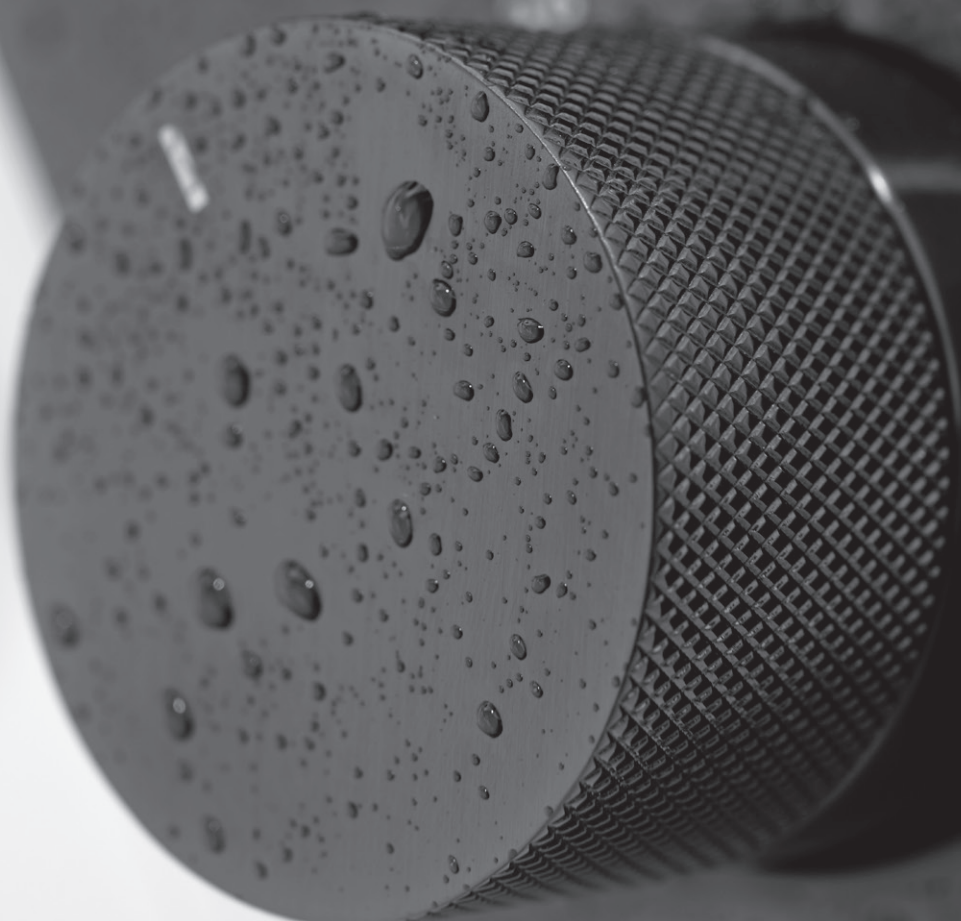


KNURLED ACCENTS

NEW


INDIVIDUAL
by VADO

Knurled Accents

NEW

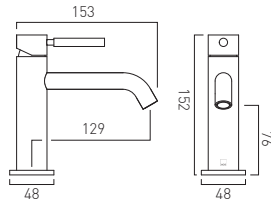

Knurled Accents slimline mono basin mixer
 single lever
 deck mounted
 smooth bodied
 without universal basin waste
 with water flow aerator
 ceramic cartridge C-010-N25
 2 x 1/2" 400mm flexpipe connections
 deck mount drill hole diameter 35mm
 minimum operating pressure 1.0 bar MP


brushed black / knurled
 IND-OR1200/SB-BLKK

brushed gold / knurled
 IND-OR1200/SB-BRGK

brushed nickel / knurled
 IND-OR1200/SB-BRNN

Etto 5 l/m flow regulator fitted as standard

NEW

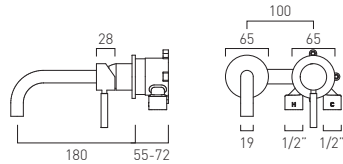

knurled Accents slimline 2 hole basin mixer
 single lever, wall mounted
 with water flow aerator
 ceramic cartridge CAR-K35B
 2 x 1/2" inlets
 min-max wall mount 55-72mm
 tile-to mortar guard included
 wall mount drill hole diameters:
 spout 40-48mm handle 45-48mm
 minimum operating pressure 0.2 bar LP


brushed black / knurled
 IND-OR1209SA-BLKK

brushed gold / knurled
 IND-OR1209SA-BRGK

brushed nickel / knurled
 IND-OR1209SA-BRNN

Etto 5 l/m flow regulator fitted as standard

NEW

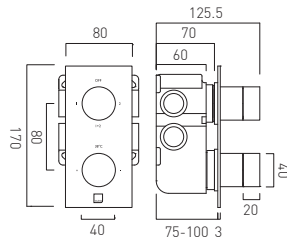

knurled Accents Tablet
 2 outlet 2 handle
 vertical concealed thermostatic shower valve
 with all-flow function
 thermostatic cartridge V-704-34S
 diverter cartridge FL-802-33/2MX
 2 x 3/4" female inlets
 2 x 3/4" female outlets
 includes 3/4" - 1/2" adaptors
 tile-to mortar guard included
 min-max wall mount 75-100mm
 optimum installation depth 87mm
 minimum operating pressure
 0.2 bar LP (shower) 1.0 bar MP (bath)


brushed black / knurled
 IND-T148/2-BLKK

brushed gold / knurled
 IND-T148/2-BRGK

brushed nickel / knurled
 IND-T148/2-BRNN



NEW

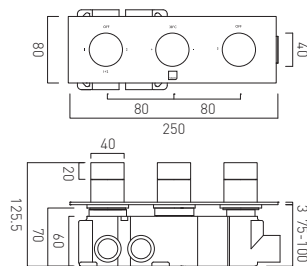

knurled Accents Tablet
 3 outlet 3 handle
 horizontal concealed thermostatic shower valve
 with all-flow function
 thermostatic cartridge V-704-34S
 diverter cartridge FL-802-33/2MX
 flow cartridge TAB-002A-3/4
 2 x 3/4" female inlets
 2 x 3/4" female outlets
 includes 3/4" - 1/2" adaptors
 tile-to mortar guard included
 min-max wall mount 75-100mm
 optimum installation depth 87mm
 minimum operating pressure
 0.2 bar LP (shower) 1.0 bar MP (bath)

brushed black / knurled
 IND-T128/3-H-BLKK

brushed gold / knurled
 IND-T128/3-H-BRGK

brushed nickel / knurled
 IND-T128/3-H-BRNN

